

ChargeHUB 25W QI2.2 WIRELESS CHARGER & DRINK HOLDER

STAY  **CHARGED**

Space-saving wireless charging and drink holder that slips neatly into 30 cm gaps between gaming machines.

25W Wireless Charger

Drink Holder

Small Footprint

Rapid Retrofit

Floor space between machines is valuable real estate. ChargeHUB 25W transforms those gaps into comfort stations that safely secure drinks and conveniently top-up patron's phones. The integrated cup holder keeps beverages off gaming consoles, while the securely mounted steel base stands firm against bumps during peak hours.

KEY FEATURES:

- 25W Fast Wireless Charging with Qi2 technology and magnetic alignment to keep every modern smartphone topped up.
- Dual-purpose tray combines a wireless charging pad and spill-resistant drink recess, maximising comfort in limited space.
- Ultra-slim footprint allows the ChargeHUB to fit in spaces as tight as 30cm; perfect for retrofits between gaming machines.
- Rapid retrofits require only a small 14mm hole and four screws; typical install is completed in minutes with minimal downtime.
- Commercial-grade durability using powder-coated steel and ABS charger head designed for high-traffic areas.



SKU: CH25BKBK

ChargeHUB 25W with Black
Tray & Black Base



Commercial-grade construction with comprehensive safety protection: over-temperature, over-voltage, over-current, short-circuit, reverse polarity, ESD, and foreign object detection (FOD). Australian SAA compliance and AS/NZS safety standards for legal commercial installation.






ChargeHUB 25W

Qi2.2 WIRELESS CHARGER & DRINK HOLDER



All measurements are listed in mm unless otherwise stated.

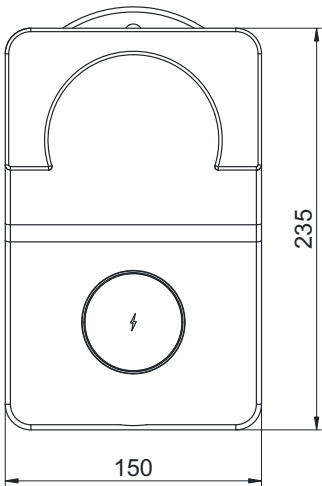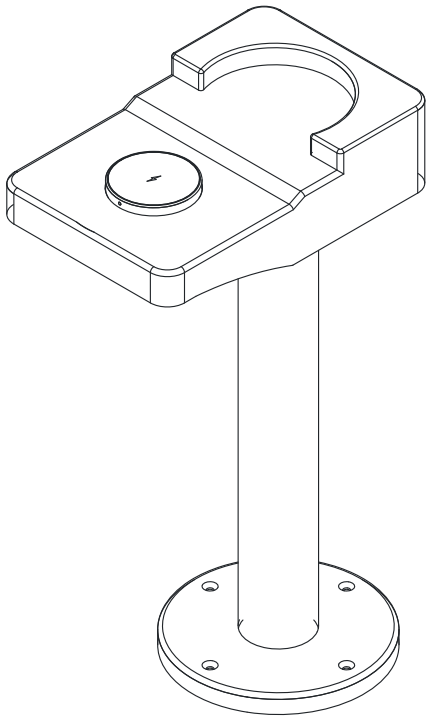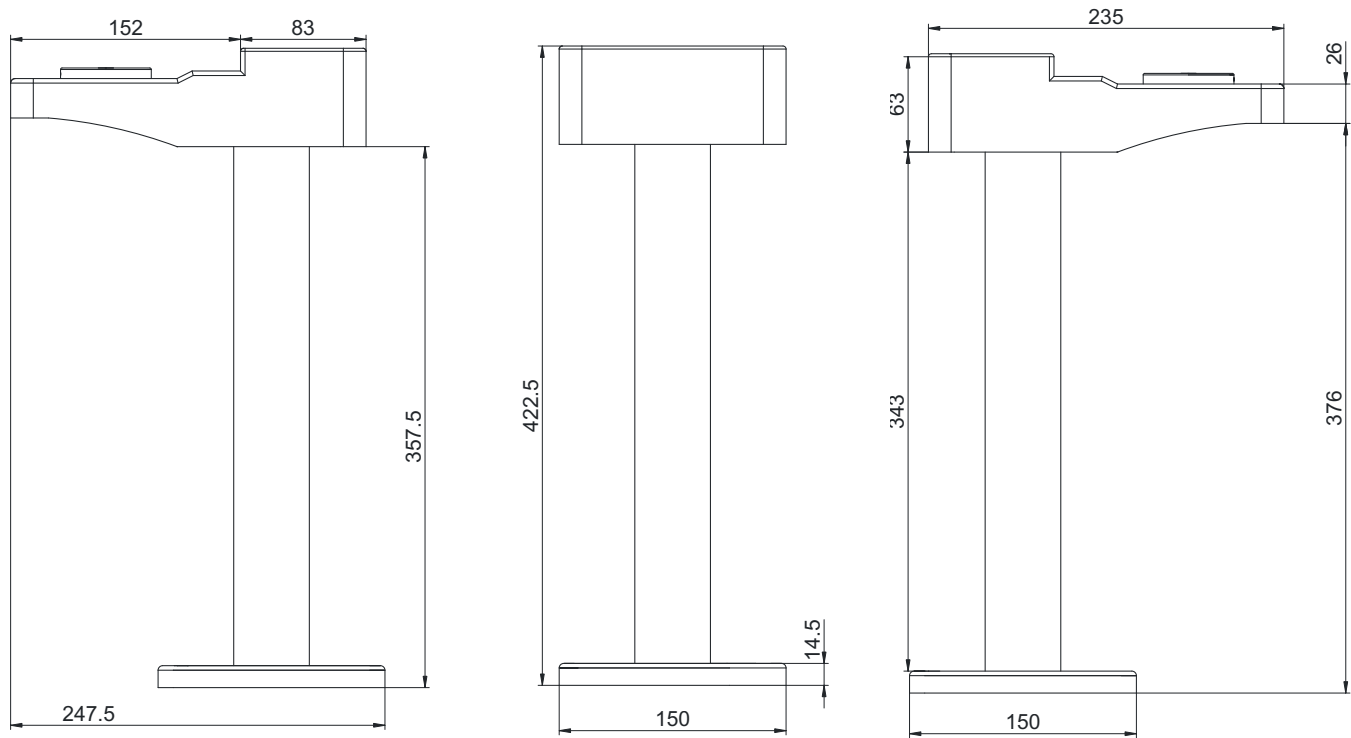

WIRELESS CHARGER	
Charging Method	One-To-One Coil
Standard	Qi2.2 MPP 25W
Output Power	5W - 25W (max)
Input Power	DC 12V 3A
Charging pad size	Ø 60mm x 7.5mm
Cable Length	1m DC tail cable
Surface Thickness	10mm - 50mm

STAND & TRAY	
Overall height	425 mm
Tray (w x d x h)	150 x 230 x 64 mm
Rod dia / length	Ø50mm x 343mm
Base dia / height	Ø 150mm x 18mm
Fixing method	4x screws; 12mm hole
Finish	Powder-coated steel
Installation gap	Min. 30cm required